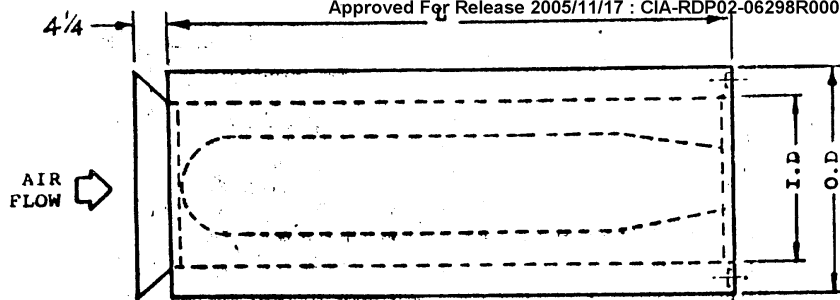


ENDING
DRILLED & TYP
12 - 1/2" DIA
EQUI-SPACED
HOLES ON
26" PCD

* FINISHED IN SHERWIN-WILLIAMS SERIES B SA GREY ENA

TAG	QTY	I.D.	O.D.	L.	C.F.M.	P.D. INS WG	INSERTION LOSS DB.					CONST
							125	250	500	1K	2K	
24 CCB-2T	3	24"	32"	48"	9,900 (max)	0.25	6	16	26	35	34	II

CASING		PERF.	MEDIA	EROSION PROTECTION	CONNECTIONS	NOTES
Class I Galv.Lockformed Steel []		Galv.	Compressed	Not Required [✓]	Slip []	INTAKE C/W INLET BELL & SCREEN
Galv.Spiral Steel []		Steel	Fiberglass	P.G. Cloth []	Flanges []	DISCHARGE END RING
Class II 16 ga.H.R.S. painted [✓]		22 ga		Mylar []	SEE NOTES	DRILLED WITH INTERNAL 1/2 NC WELDNUTS
ENGINEER		PROJECT		DRAWN BY	VIBRO-ACOUSTICS	
				BH.		
CUSTOMER		CIRCULAR SILENCER		CHECKED BY		
AIR TECHNOLOGY INC. ROSELLE, IL.		MODEL CCB				
				DATE	DWG. NO. -	
				June 6/85	5655/R1	